



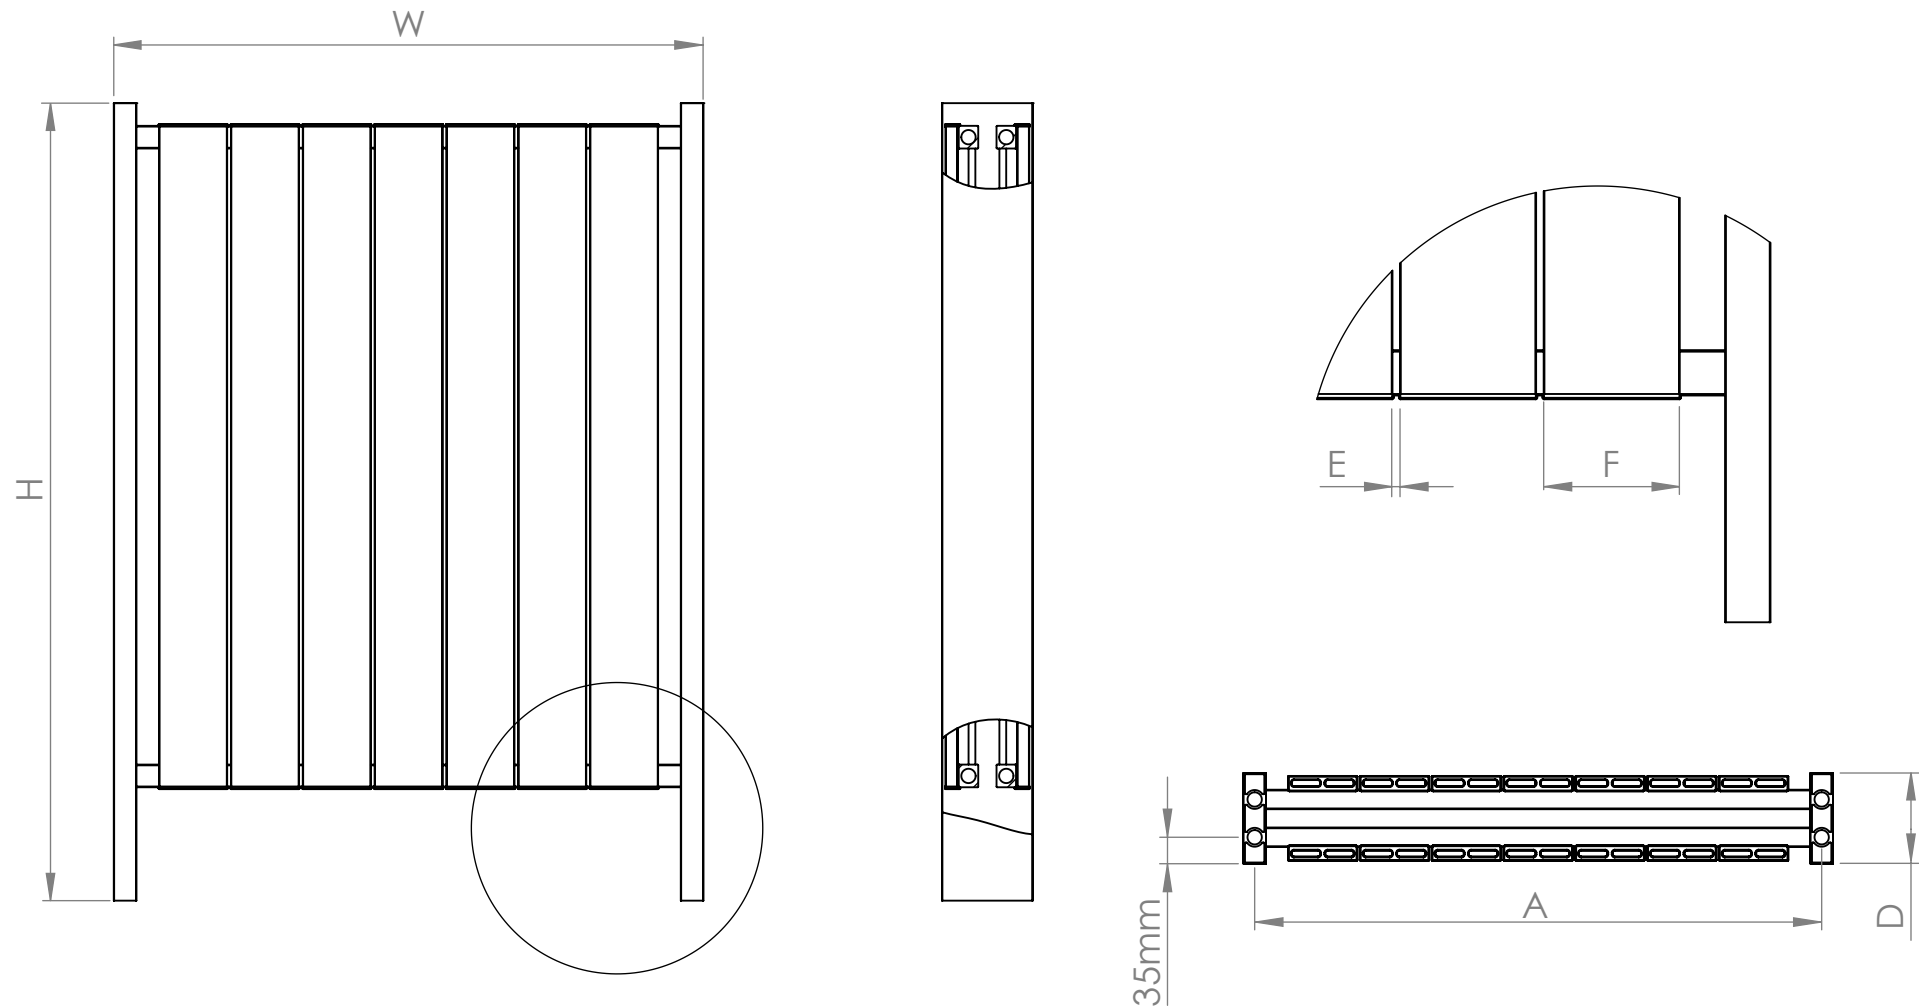

Connection Types



Model	Section	Width W (mm)	Height H (mm)	A Axis Dimension (mm)	D Depth of the Product (mm)	F Tube Width (mm)	E Gap Between Two Tubes (mm)	K Wall to Radiator Front (mm)	L Wall to Radiator Axis Center (mm)	M Wall to Radiator Back (mm)	Heat Output ΔT=30 °C (Watt)	Heat Output ΔT=50 °C (Watt)	Heat Output ΔT=60 °C (Watt)	Heat Output ΔT=70 °C (Watt)	BTU/h	Net Weight (kg)	Gross Weight (kg)	Water Volume (l)	Package Volume (m³)	Package Dimensions H x W x D (mm)
Fiona Max 620	10	620	575	590	130	99	1	N/A	N/A	N/A	319	824	1071	1285	4382	12,29	14,39	2,33	0,08	690X645X162
	10	620	675	590	130	99	1	N/A	N/A	N/A	364	940	1222	1467	5002	14,21	16,47	2,67	0,09	790X645X162
	10	620	775	590	130	99	1	N/A	N/A	N/A	407	1051	1367	1640	5593	16,13	18,55	3,00	0,10	890X645X162
	10	620	875	590	130	99	1	N/A	N/A	N/A	448	1157	1504	1805	6156	18,05	20,62	3,33	0,11	990X645X162
Fiona Max 820	14	820	575	790	130	99	1	N/A	N/A	N/A	446	1153	1499	1799	6135	15,53	17,96	2,77	0,10	690X845X162
	14	820	675	790	130	99	1	N/A	N/A	N/A	509	1316	1711	2054	7003	17,99	20,63	3,16	0,11	790X845X162
	14	820	775	790	130	99	1	N/A	N/A	N/A	570	1472	1914	2296	7830	20,45	23,28	3,55	0,13	890X845X162
	14	820	875	790	130	99	1	N/A	N/A	N/A	627	1620	2106	2528	8619	22,90	25,92	3,94	0,14	990X845X162
Fiona Max 1020	18	1020	575	990	130	99	1	N/A	N/A	N/A	574	1483	1928	2313	7888	18,78	21,55	3,22	0,12	690X1045X162
	18	1020	675	990	130	99	1	N/A	N/A	N/A	655	1693	2200	2640	9004	21,77	24,77	3,66	0,14	790X1045X162
	18	1020	775	990	130	99	1	N/A	N/A	N/A	732	1893	2460	2952	10068	24,76	27,99	4,11	0,16	890X1045X162
	18	1020	875	990	130	99	1	N/A	N/A	N/A	806	2083	2708	3250	11081	27,76	31,22	4,56	0,17	990X1045X162
Fiona Max 1220	22	1220	575	1190	130	99	1	N/A	N/A	N/A	701	1812	2356	2827	9641	22,04	25,15	3,66	0,14	690X1245X162
	22	1220	675	1190	130	99	1	N/A	N/A	N/A	801	2069	2689	3227	11004	25,56	28,93	4,16	0,16	790X1245X162