


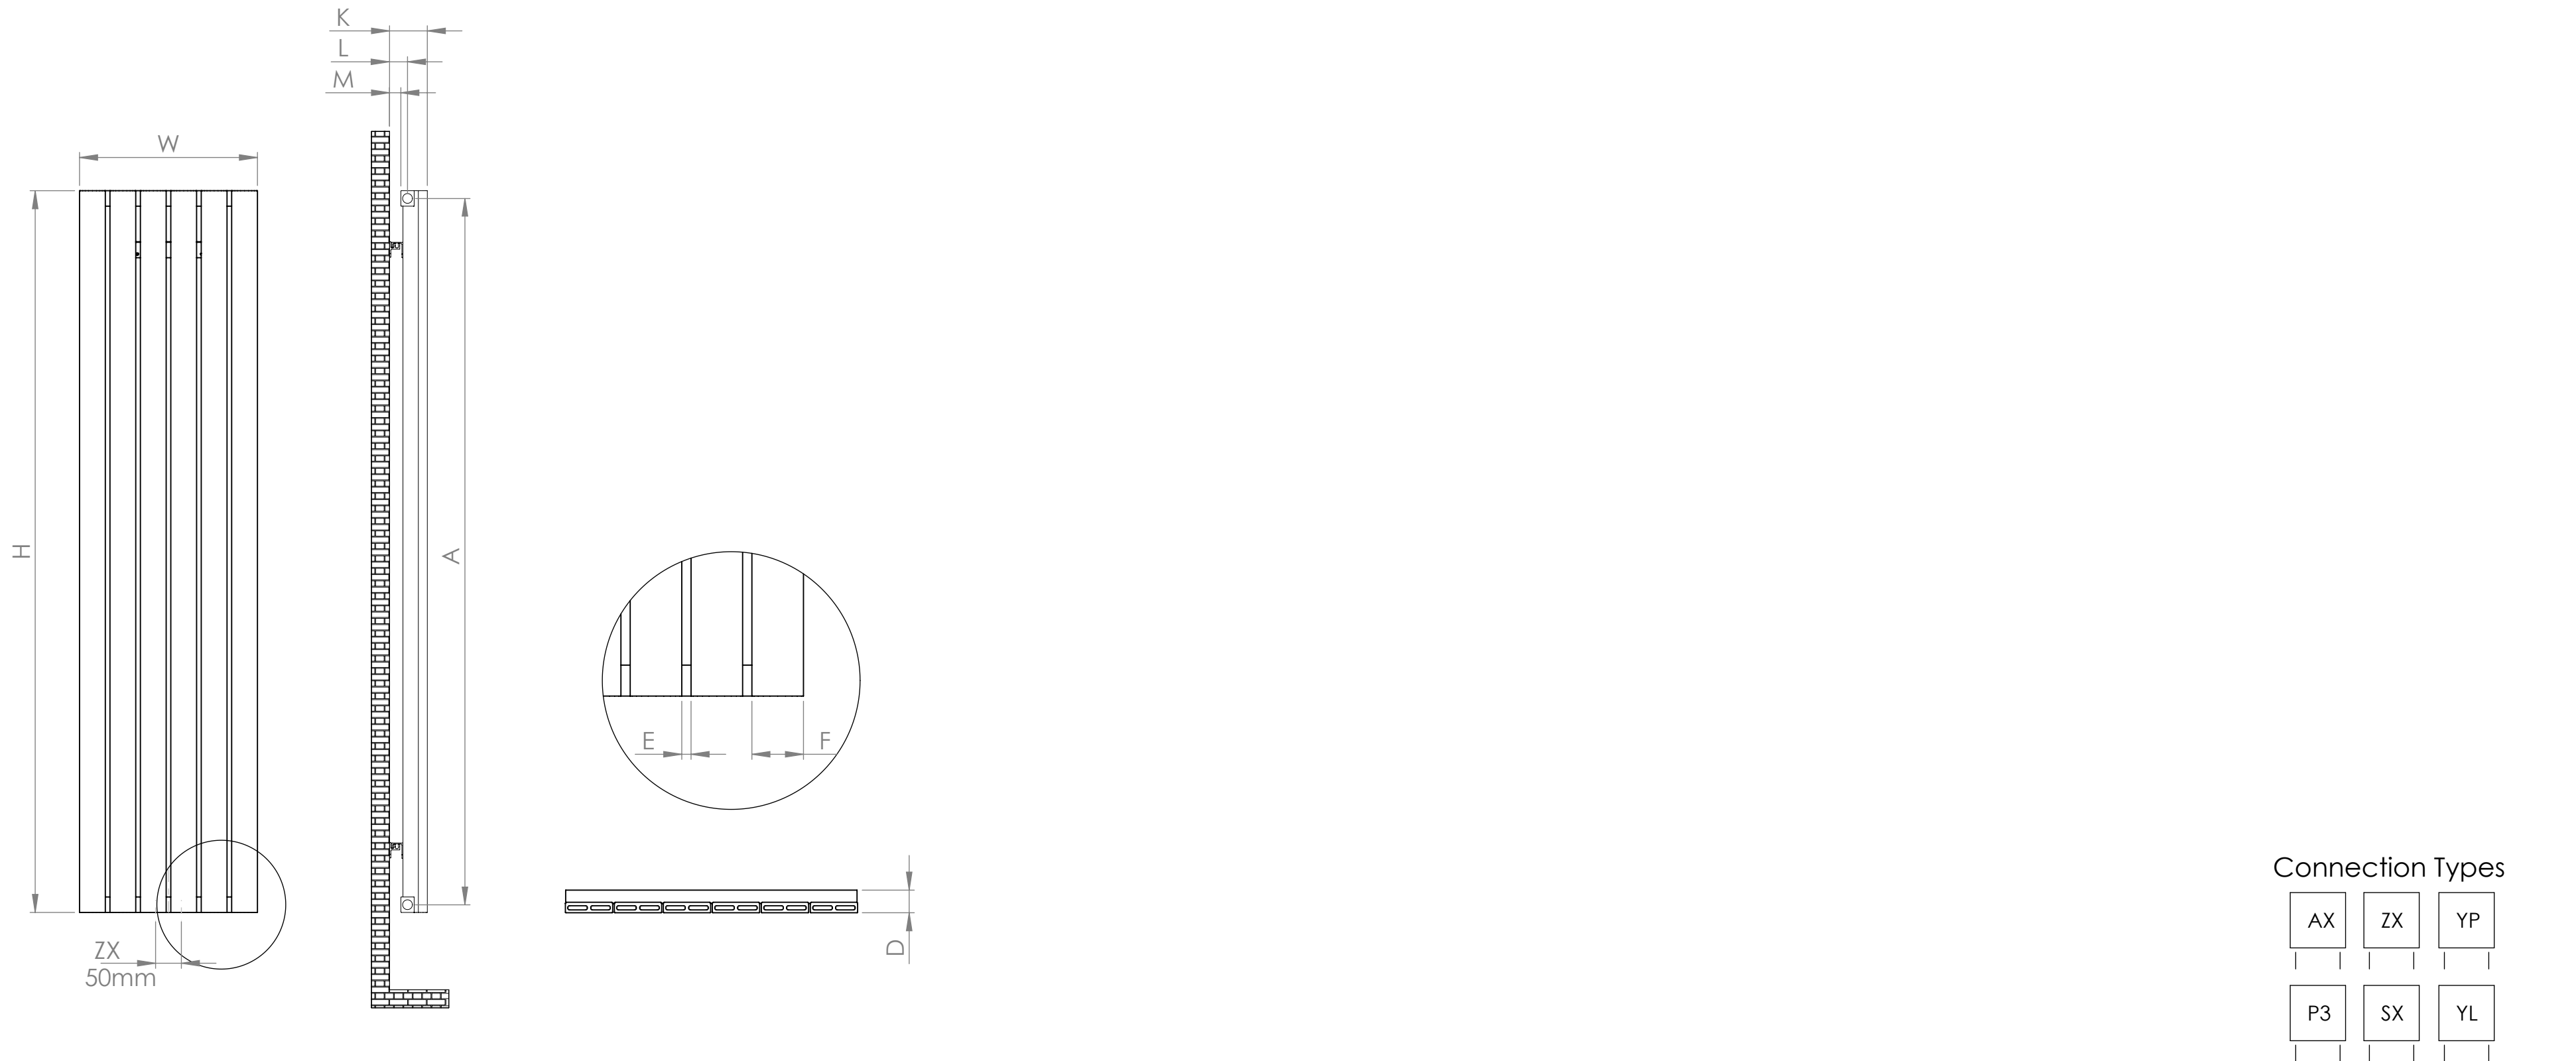

Model	Section	Width W (mm)	Height H (mm)	A Axis Dimension (mm)	D Depth of the Product (mm)	F Tube Width (mm)	E Gap Between Two Tubes (mm)	K Wall to Radiator Front (mm)	L Wall to Radiator Axis Center (mm)	M Wall to Radiator Back (mm)	Heat Output ΔT=30 °C (Watt)	Heat Output ΔT=50 °C (Watt)	Heat Output ΔT=60 °C (Watt)	Heat Output ΔT=70 °C (Watt)	BTU/h	Net Weight (kg)	Gross Weight (kg)	Water Volume (l)	Package Volume (m³)	Package Dimensions H x W x D (mm)
Seul 375	4	375	300	245	43	90	5	74-83	37-46	24-33	53	136	177	212	724	2,46	3,37	0,37	0,02	390X410X78
	4	375	400	345	43	90	5	74-83	37-46	24-33	72	185	241	289	986	2,93	3,94	0,43	0,02	490X410X78
	4	375	500	445	43	90	5	74-83	37-46	24-33	92	237	308	370	1260	3,40	4,52	0,49	0,02	590X410X78
	4	375	600	545	43	90	5	74-83	37-46	24-33	112	291	378	453	1546	3,88	5,10	0,55	0,03	690X410X78
	4	375	700	645	43	90	5	74-83	37-46	24-33	128	332	431	517	1764	4,35	5,67	0,60	0,03	790X410X78
	4	375	800	745	43	90	5	74-83	37-46	24-33	144	371	482	579	1973	4,82	6,24	0,66	0,03	890X410X78
	4	375	900	845	43	90	5	74-83	37-46	24-33	158	408	531	637	2171	5,29	6,82	0,72	0,04	990X410X78
	4	375	1000	945	43	90	5	74-83	37-46	24-33	172	444	577	692	2361	5,77	7,41	0,77	0,04	1090X410X78
	4	375	1200	1145	43	90	5	74-83	37-46	24-33	197	510	662	795	2710	6,71	8,54	0,89	0,05	1290X410X78
	4	375	1400	1345	43	90	5	74-83	37-46	24-33	226	585	760	913	3112	7,66	9,71	1,00	0,05	1490X410X78
Seul 375	4	375	1600	1545	43	90	5	74-83	37-46	24-33	260	672	873	1048	3573	8,57	10,82	1,12	0,06	1690X410X78
	4	375	1800	1745	43	90	5	74-83	37-46	24-33	298	771	1003	1203	4102	9,52	11,97	1,23	0,07	1890X410X78

Model	Section	Width W (mm)	Height H (mm)	A Axis Dimension (mm)	D Depth of the Product (mm)	F Tube Width (mm)	E Gap Between Two Tubes (mm)	K Wall to Radiator Front (mm)	L Wall to Radiator Axis Center (mm)	M Wall to Radiator Back (mm)	Heat Output ΔT=30 °C (Watt)	Heat Output ΔT=50 °C (Watt)	Heat Output ΔT=60 °C (Watt)	Heat Output ΔT=70 °C (Watt)	BTU/h	Net Weight (kg)	Gross Weight (kg)	Water Volume (l)	Package Volume (m³)	Package Dimensions H x W x D (mm)
Seul 565	6	565	300	245	43	90	5	74-83	37-46	24-33	79	204	265	318	1086	3,68	4,76	0,56	0,02	390X600X78
	6	565	400	345	43	90	5	74-83	37-46	24-33	108	278	362	434	1480	4,39	5,60	0,65	0,03	490X600X78
	6	565	500	445	43	90	5	74-83	37-46	24-33	138	355	462	554	1890	5,10	6,45	0,73	0,03	590X600X78
	6	565	600	545	43	90	5	74-83	37-46	24-33	169	436	567	680	2318	5,81	7,29	0,82	0,04	690X600X78
	6	565	700	645	43	90	5	74-83	37-46	24-33	193	497	647	776	2646	6,52	8,15	0,90	0,04	790X600X78
	6	565	800	745	43	90	5	74-83	37-46	24-33	215	556	723	868	2959	7,22	8,99	0,99	0,05	890X600X78
	6	565	900	845	43	90	5	74-83	37-46	24-33	237	612	796	955	3257	7,93	9,83	1,08	0,05	990X600X78
	6	565	1000	945	43	90	5	74-83	37-46	24-33	258	666	865	1038	3541	8,64	10,68	1,16	0,06	1090X600X78
	6	565	1200	1145	43	90	5	74-83	37-46	24-33	296	764	994	1192	4066	10,06	12,38	1,33	0,07	1290X600X78
	6	565	1400	1345	43	90	5	74-83	37-46	24-33	340	877	1141	1369	4668	11,48	14,06	1,50	0,07	1490X600X78
Seul 755	6	565	1600	1545	43	90	5	74-83	37-46	24-33	390	1008	1310	1572	5360	12,87	15,74	1,68	0,08	1690X600X78
	6	565	1800	1745	43	90	5	74-83	37-46	24-33	448	1157	1504	1805	6154	14,29	17,59	1,85	0,09	1890X600X78
	8	755	300	245	43	90	5	74-83	37-46	24-33	105	272	354	425	1448	4,91	6,32	0,75	0,03	390X790X78
	8	755	400	345	43	90	5	74-83	37-46	24-33	144	371	482	579	1973	5,86	7,45	0,86	0,04	490X790X78
	8	755	500	445	43	90	5	74-83	37-46	24-33	183	474	616	739	2520	6,80	8,56	0,98	0,04	590X790X78
	8	755	600	545	43	90	5	74-83	37-46	24-33	225	581	755	907	3091	7,75	9,67	1,09	0,05	690X790X78
	8	755	700	645	43	90	5	74-83	37-46	24-33	257	663	862	1035	3529	8,69	10,78	1,20	0,05	790X790X78
	8	755	800	745	43	90	5	74-83	37-46	24-33	287	742	964	1157	3946	9,64	11,91	1,32	0,06	890X790X78
	8	755	900	845	43	90	5	74-83	37-46	24-33	316	816	1061	1274	4343	10,58	13,02	1,43	0,07	990X790X78
	8	755	1000	945	43	90	5	74-83	37-46	24-33	343	888	1154	1385	4721	11,53	14,14	1,55	0,07	1090X790X78
Seul 945	8	755	1200	1145	43	90	5	74-83	37-46	24-33	394	1019	1325	1590	5421	13,42	16,37	1,78	0,08	1290X790X78
	8	755	1400	1345	43	90	5	74-83	37-46	24-33	453	1170	1521	1825	6224	15,31	18,61	2,01	0,10	1490X790X78
	8	755	1600	1545	43	90	5	74-83	37-46	24-33	520	1343	1746	2096	7146	17,15	20,79	2,23	0,11	1690X790X78
	8	755	1800	1745	43	90	5	74-83	37-46	24-33	597	1542	2005	2406	8205	19,05	23,02	2,46	0,12	1890X790X78
	10	945	300	245	43	90	5	74-83	37-46	24-33	132	340	442	531	1810	6,14	7,72	0,93	0,03	390X980X78
	10	945	400	345	43	90	5	74-83	37-46	24-33	179	464	603	723	2466	7,32	9,09	1,08	0,04	490X980X78
	10	945	500	445	43	90	5	74-83	37-46	24-33	229	592	770	924	3151	8,51	10,50	1,22	0,05	590X980X78
	10	945	600	545	43	90	5	74-83	37-46	24-33	281	726	944	1133	3864	9,69	11,88	1,36	0,06	690X980X78
	10	945	700	645	43	90	5	74-83	37-46	24-33	321	829	1078	1293	4411	10,87	13,27	1,51	0,07	790X980X78
	10	945	800	745	43	90	5	74-83	37-46	24-33	359	927	1205	1446	4932	12,05	14,66	1,65	0,07	890X980X78
Seul 1135	10	945	900	845	43	90	5	74-83	37-46	24-33	395	1021	1327	1592	5429	13,23	16,04	1,79	0,08	990X980X78
	10	945	1000	945	43	90	5	74-83	37-46	24-33	429	1109	1442	1731	5902	14,42	17,43	1,93	0,09	1090X980X78
	10	945	1200	1145	43	90	5	74-83	37-46	24-33	493	1274	1656	1987	6776	16,78	20,21	2,22	0,10	1290X980X78
	10	945	1400	1345	43	90	5	74-83	37-46	24-33	566	1462	1901	2281	7780	19,14	22,97	2,51	0,12	1490X980X78
	10	945	1600	1545	43	90	5	74-83	37-46	24-33	650	1679	2183	2620	8933	21,44	25,69	2,79	0,13	1690X980X78
	10	945	1800	1745	43	90	5	74-83	37-46	24-33	746	1928	2506	3008	10256	23,80	28,46	3,08	0,15	1890X980X78
	12	1135	300	245	43	90	5	74-83	37-46	24-33	158	408	531	637	2171	7,37	9,11	1,12	0,04	390X1170X78
	12	1135	400	345	43	90	5	74-83	37-46	24-33	215	556	723	868	2959	8,78	10,77	1,29	0,05	490X1170X78
	12																			

Model	Section	Width W (mm)	Height H (mm)	A Axis Dimension (mm)	D Depth of the Product (mm)	F Tube Width (mm)	E Gap Between Two Tubes (mm)	K Wall to Radiator Front (mm)	L Wall to Radiator Axis Center (mm)	M Wall to Radiator Back (mm)	Heat Output ΔT=30 °C (Watt)	Heat Output ΔT=50 °C (Watt)	Heat Output ΔT=60 °C (Watt)	Heat Output ΔT=70 °C (Watt)	BTU/h	Net Weight (kg)	Gross Weight (kg)	Water Volume (l)	Package Volume (m³)	Package Dimensions H x W x D (mm)
Seul 1705	18	1705	300	245	43	90	5	74-83	37-46	24-33	237	612	796	955	3257	11,05	13,30	1,68	0,06	390X1740X78
	18	1705	400	345	43	90	5	74-83	37-46	24-33	323	834	1085	1302	4439	13,18	15,76	1,94	0,07	490X1740X78
	18	1705	500	445	43	90	5	74-83	37-46	24-33	413	1066	1386	1663	5671	15,31	18,24	2,19	0,09	590X1740X78
	18	1705	600	545	43	90	5	74-83	37-46	24-33	506	1308	1700	2040	6955	17,43	20,70	2,45	0,10	690X1740X78
	18	1705	700	645	43	90	5	74-83	37-46	24-33	578	1492	1940	2328	7939	19,56	23,17	2,71	0,11	790X1740X78
	18	1705	800	745	43	90	5	74-83	37-46	24-33	646	1669	2170	2603	8878	21,69	25,65	2,96	0,13	890X1740X78
	18	1705	900	845	43	90	5	74-83	37-46	24-33	711	1837	2388	2866	9772	23,82	28,12	3,22	0,14	990X1740X78
Seul 1895	18	1705	1000	945	43	90	5	74-83	37-46	24-33	773	1997	2596	3115	10623	25,94	30,58	3,48	0,15	1090X1740X78
	20	1895	300	245	43	90	5	74-83	37-46	24-33	263	680	884	1061	3619	12,28	14,70	1,86	0,06	390X1930X78
	20	1895	400	345	43	90	5	74-83	37-46	24-33	359	927	1205	1446	4932	14,65	17,45	2,15	0,08	490X1930X78
	20	1895	500	445	43	90	5	74-83	37-46	24-33	458	1185	1540	1848	6301	17,01	20,18	2,44	0,09	590X1930X78
	20	1895	600	545	43	90	5	74-83	37-46	24-33	562	1453	1889	2266	7728	19,38	22,92	2,72	0,11	690X1930X78
	20	1895	700	645	43	90	5	74-83	37-46	24-33	642	1658	2156	2587	8822	21,74	25,66	3,01	0,12	790X1930X78
	20	1895	800	745	43	90	5	74-83	37-46	24-33	718	1854	2411	2893	9864	24,10	28,40	3,29	0,14	890X1930X78
Seul 1895	20	1895	900	845	43	90	5	74-83	37-46	24-33	790	2041	2653	3184	10857	26,47	31,15	3,58	0,15	990X1930X78
	20	1895	1000	945	43	90	5	74-83	37-46	24-33	859	2219	2884	3461	11803	28,83	33,72	3,87	0,17	1090X1930X78