



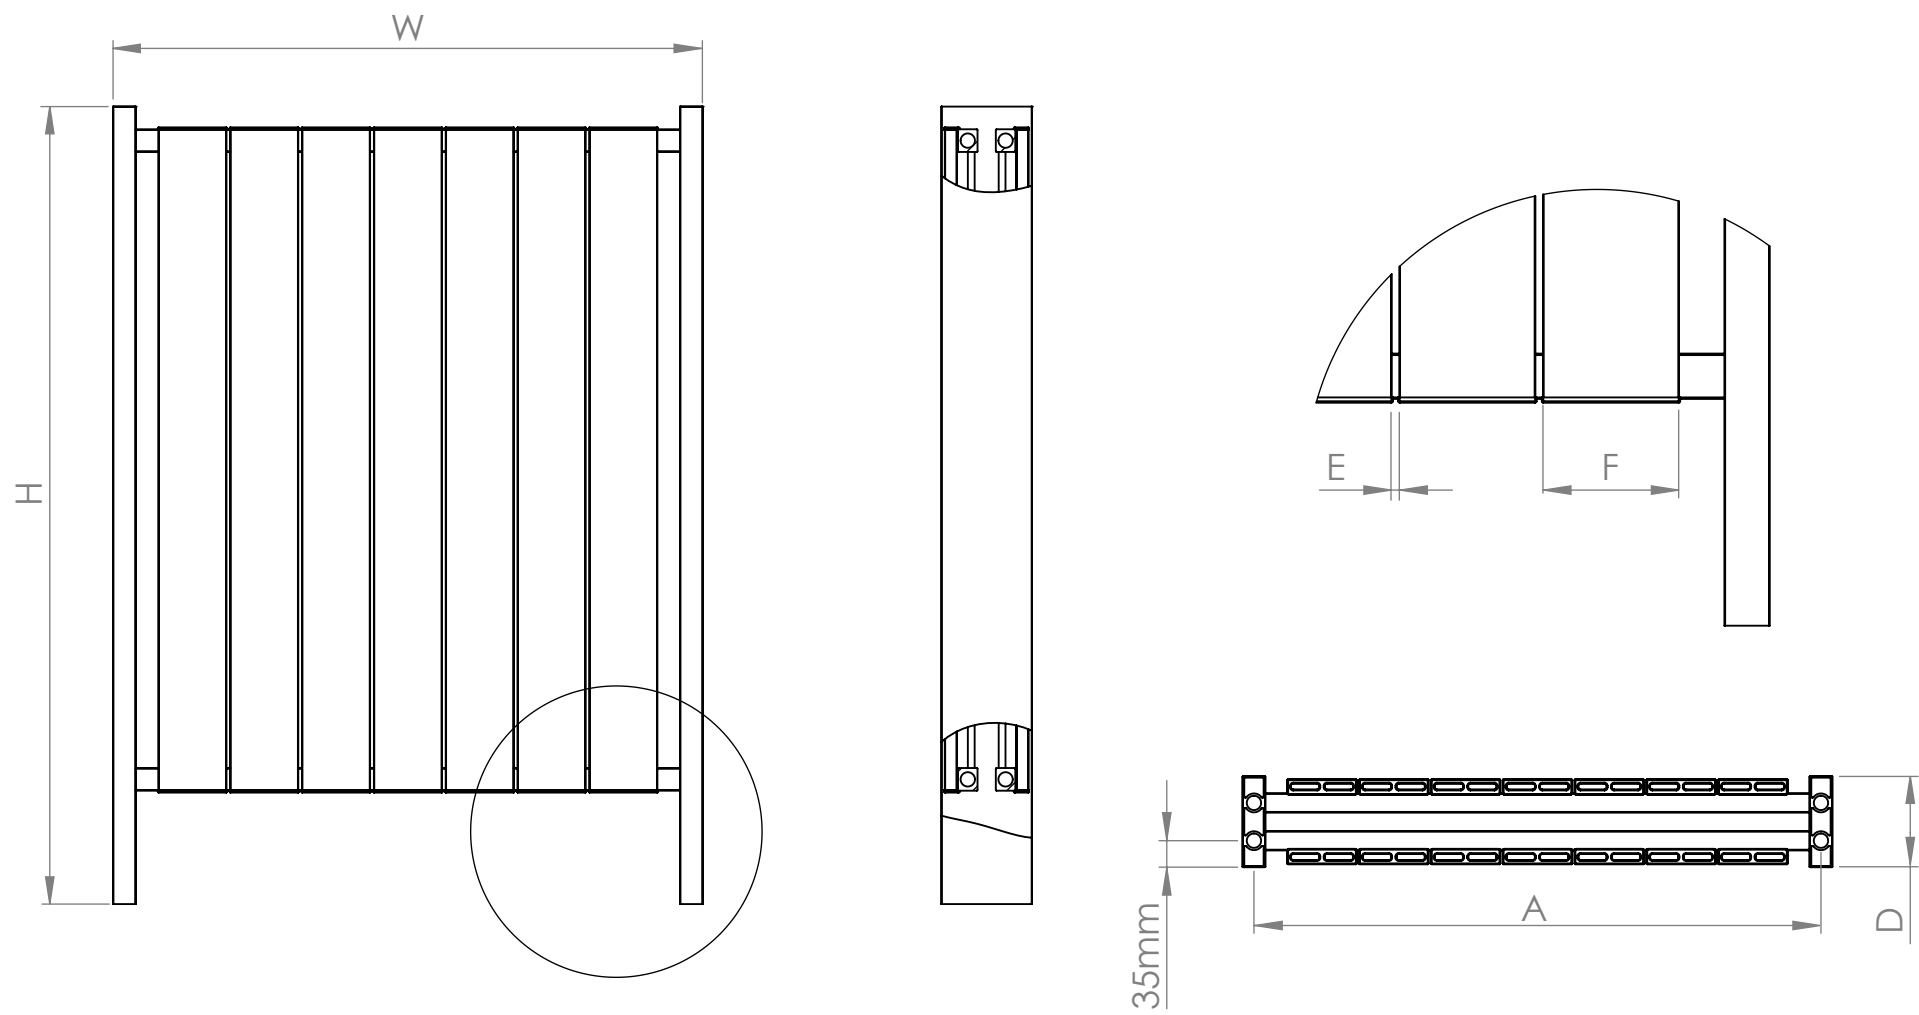

Connection Types



Model	Section	Width W (mm)	Height H (mm)	A Axis Dimension (mm)	D Depth of the Product (mm)	F Tube Width (mm)	E Gap Between Two Tubes (mm)	K Wall to Radiator Front (mm)	L Wall to Radiator Axis Center (mm)	M Wall to Radiator Back (mm)	Heat Output $\Delta T=30\text{ }^{\circ}\text{C}$ (Watt)	Heat Output $\Delta T=50\text{ }^{\circ}\text{C}$ (Watt)	Heat Output $\Delta T=60\text{ }^{\circ}\text{C}$ (Watt)	Heat Output $\Delta T=70\text{ }^{\circ}\text{C}$ (Watt)	BTU/h	Net Weight (kg)	Gross Weight (kg)	Water Volume (l)	Package Volume (m³)	Package Dimensions H x W x D (mm)
Albite Max 610	18	610	575	580	197	50	5	N/A	N/A	N/A	564	1458	1895	2274	7756	16,21	18,44	2,75	0,11	690X635X229
	18	610	675	580	197	50	5	N/A	N/A	N/A	644	1664	2164	2596	8853	19,19	21,59	3,20	0,12	790X635X229
	18	610	775	580	197	50	5	N/A	N/A	N/A	720	1861	2419	2903	9899	22,16	24,72	3,64	0,13	890X635X229
	18	610	875	580	197	50	5	N/A	N/A	N/A	793	2048	2663	3195	10896	25,14	27,87	4,09	0,15	990X635X229
Albite Max 720	22	720	575	690	197	50	5	N/A	N/A	N/A	690	1782	2317	2780	9480	18,91	21,33	3,09	0,12	690X745X229
	22	720	675	690	197	50	5	N/A	N/A	N/A	787	2034	2644	3173	10821	22,41	25,02	3,59	0,14	790X745X229
	22	720	775	690	197	50	5	N/A	N/A	N/A	880	2274	2957	3548	12099	25,92	28,73	4,10	0,16	890X745X229
	22	720	875	690	197	50	5	N/A	N/A	N/A	969	2504	3255	3905	13318	29,42	32,40	4,60	0,17	990X745X229
Albite Max 830	26	830	575	800	197	50	5	N/A	N/A	N/A	815	2106	2738	3285	11203	21,59	24,20	3,43	0,14	690X855X229
	26	830	675	800	197	50	5	N/A	N/A	N/A	930	2404	3125	3750	12788	25,63	28,46	3,99	0,16	790X855X229
	26	830	775	800	197	50	5	N/A	N/A	N/A	1040	2688	3494	4193	14299	29,66	32,69	4,55	0,18	890X855X229
	26	830	875	800	197	50	5	N/A	N/A	N/A	1145	2959	3846	4616	15739	33,69	36,93	5,11	0,20	990X855X229
Albite Max 940	30	940	575	910	197	50	5	N/A	N/A	N/A	940	2430	3159	3791	12927	24,28	27,09	3,77	0,16	690X965X229
	30	940	675	910	197	50	5	N/A	N/A	N/A	1073	2774	3606	4327	14755	28,84	31,88	4,39	0,18	790X965X229
	30	940	775	910	197	50	5	N/A	N/A	N/A	1200	3102	4032	4838	16499	33,40	36,67	5,01	0,20	890X965X229
	30	940	875	910	197	50	5	N/A	N/A	N/A	1321	3414	4438	5326	18160	37,97	41,47	5,62	0,22	990X965X229
Albite Max 1050	34	1050	575	1020	197	50	5	N/A	N/A	N/A	1066	2754	3580	4296	14650	26,96	29,98	4,11	0,17	690X1075X229
	34	1050	675	1020	197	50	5	N/A	N/A	N/A	1217	3144	4087	4904	16723	32,05	35,31	4,78	0,20	790X1075X229
	34	1050	775	1020	197	50	5	N/A	N/A	N/A	1360	3515	4570	5484	18699	37,15	40,65	5,46	0,22	890X1075X229
	34	1050	875	1020	197	50	5	N/A	N/A	N/A	1497	3869	5030	6036	20582	42,24	45,99	6,13	0,25	990X1075X229
Albite Max 1160	38	1160	575	1130	197	50	5	N/A	N/A	N/A	1191	3078	4001	4802	16374	29,65	32,86	4,45	0,19	690X1185X229
Albite Max 1270	42	1270	575	1240	197	50	5	N/A	N/A	N/A	1317	3402	4423	5307	18097	32,34	35,74	4,79	0,21	690X1295X229
Albite Max 1380	46	1380	575	1350	197	50	5	N/A	N/A	N/A	1442	3726	4844	5813	19821	35,02	38,61	5,12	0,23	690X1405X229